

Thermal Printer

24V, FTP-607 Series

3" HIGH SPEED THERMAL PRINTER

FTP-637MCL411-R/421-R


■ OVERVIEW

The FTP-637 MCL series are 24V driven high-speed printers with with a long life, ultra low profile auto cutter.

The FTP-637 MCL Series can be used for a variety of applications, such as POS terminals, ticket vending machines, label printers, banking terminals, measurement and medical equipment.

■ HIGHLIGHTS

- **Ultra low profile**
Height 21.8 mm, width 103.2/104.5 mm, depth 42.2 mm
- **High speed printing**
Using Meiko Electronic Components unique head drive control, maximum print speeds of 100/170/150mm per second can be achieved.
- **Auto Cutter**
Long life, guillotine style cutter with a dedicated motor.
- **Easy paper loading**
Meiko Electronic Components' unique lever assisted platen release mechanism allows for easy paper loading and easy head maintenance.
- **Multifunctional die-cast frame**
The rugged die-cast frame provides excellent ESD performance, is shock/vibration resistant and the heat-sink allows for continuous printing.
- **RoHS compliant**

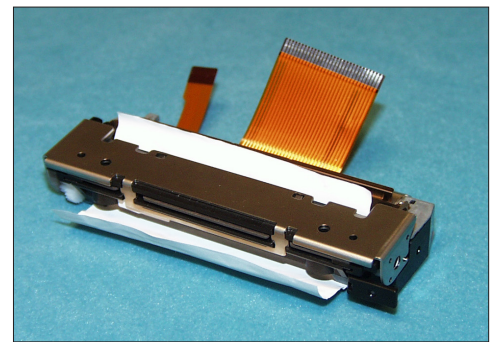

FTP-637MCL411-R/421-R

■ PART NUMBERS

			Part Number
Easy Load Model with low profile cutter			FTP-637MCL411-R (Partial cut: single tab) FTP-637MCL421-R (Partial cut: double tab)
LSI for driving		MCL411-R/421-R	FTP-627CU441-R
Interface board for Mech/Cutter	USB/ RS-232C	MCL411-R	FTP-627DSL441-R
		MCL421-R	FTP-627DSL441-R
Interface cables	USB		FTP-629Y301#01-R
	Serial (RS232C)		FTP-628Y302-R
Power cables		MCL411-R/421-R	FTP-629Y601

■ SPECIFICATIONS

Item		Specifications
Part number		FTP-637MCL411-R/421-R
Printing method		Thermal-line dot method
Dot structure		576 dots/line
Dot pitch (Horizontal)		0.125 mm (8 dots/mm)—Dot density
Dot pitch (Vertical)		0.125 mm (8 dots/mm)—Line feed pitch
Effective printing area		72 mm
Number of columns		ANK 48 columns/line (maximum 12 x 24 dot font)
Paper width		80 mm +1/-0
Paper thickness		60-85 µm (not all papers can be used due to the paper characteristics)
Printing Speed	MCL411-R	Maximum 170mm/sec. (1,360 dot line/sec.)
	MCL421-R	Maximum 100mm/sec. (800 dot line/sec.)
Character types		Alphanumeric, kana: 159 types International characters: 195 types JIS Kanji (Kanji CG loaded board): about 6800 types
Character, dimensions (W×H), number of columns		12 × 24 dots, (1.5 × 3.0 mm), 48 columns: ANK 24 × 24 dots, (3.0 × 3.0 mm), 24 columns: ANK 8 × 16 dots, (1.0 × 2.0 mm), 72 columns: ANK 16 × 16 dots, (2.0 × 2.0 mm), 36 columns: ANK

■ SPECIFICATIONS


Item			Specification	
Interface			Conforms to RS232C/USB	
Power supply	For print head	MCL411-R/421-R	24VDC±5% approx. 4.5A (MCL411-R), 4.4A (MCL421-R) at 25°C, Rav=1,500Ω, concurrent applied dot number 288dots	
	For motor	MCL421-R	24 VDC ±5%, 1.0 A maximum	
		MCL411-R	24 VDC ±5%, 1.0 A maximum	
	For cutter	MCL421-R	24 VDC ±5%, 1.1 A maximum	
		MCL411-R	24 VDC ±5%, 1.1 A maximum	
	For logic	MCL421-R	2.7 to 3.3VDC or 4.75 to 5.25 VDC, 0.1 A maximum	
		MCL411-R	2.7 to 3.3VDC or 4.75 to 5.25VDC, 0.1 A maximum	
Dimensions	Mechanism with cutter	MCL421-R	103.2 x 42.2 x 21.8 mm (WxDxH)	
		MCL411-R	104.5 x 42.2 x 21.8 mm (WxDxH)	
	Interface board	DSL4xx	40 x 70 x 16.2 mm (WxDxH)	
Weight	Mechanism with cutter		Approximately 411-R:124g / 421-R: 118g	
	Interface board		Approximately DSL4xx: 20g	
Life	Head	MCL421-R	Pulse durability: 50 million pulses/dot (print ratio: 12.5% or less).	
		MCL411-R	Pulse durability: 100 million pulses/dot (print ratio: 12.5% or less).	
		MCL421-R	Abrasion resistance: paper traveling distance 50km	
		MCL411-R	Abrasion resistance: paper traveling distance 100km	
	Cutter	MCL421-R	500,000 cuts	
		MCL411-R	1,000,000 cuts	
	Platen		5,000 times (open/close)	
Operating environment	Operating temperature		0°C to +50°C (+5°C to +40°C printing density assurance range)	
	Operating humidity		20 to 85% RH (no condensation)	
	Storage temperature		-20°C to +60°C (paper not included)	
	Storage humidity		5 to 95% RH (no condensation)	
Detection function	Head temperature detection		Detected by thermistor	
	Paper out/mark detection		Detected by photo-interruptor	
	Platen release		Detected by sliding switch	
Recommended thermal sensitive paper			High sensitive paper	TF50KS-E4 (Nippon)
			Standard paper	TF60KS-E (Nippon), PD150R (Oji)
			Medium life paper	TF60KS-F1 (Nippon), PD170R (Oji), P220VBB-1 (Mitsubishi)
			Long life paper	PD160R (Oji), AFP-235 (Mitsubishi), TP50KJ-R (Nippon), HA220AA (Nippon)

■ FUNCTION OF INTERFACE BOARD

	Item		Item
1.	Test print function	8.	Cutter trouble detect
2.	Paper out detection	9.	Motor power saving function
3.	Paper near end detection	10.	Mark detection function
4.	Platen open detection	11.	MCU operation abnormality detection
5.	Thermal head temperature abnormality detection	12.	Power ON/OFF sequence protection
6.	Blow-out fuse detection	13.	Motor over-current protection
7.	Head voltage abnormality detection	14.	Hardware timer

■ DIMENSIONS

1. Printer mechanism

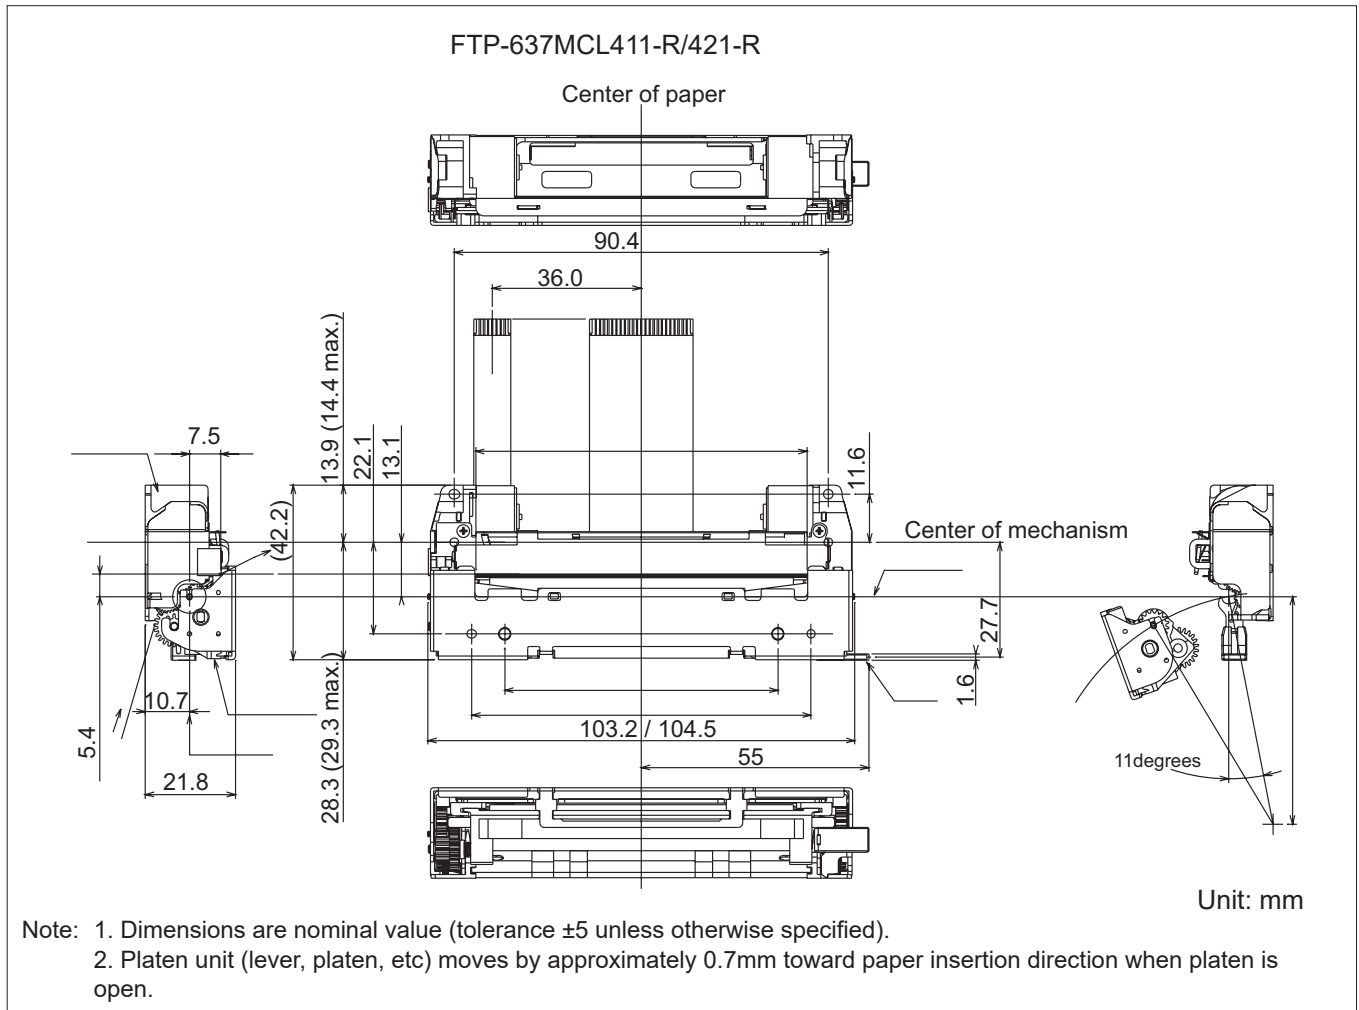

1. Connector (FPC) specification (CN4)


(1) Connector

Mechanical unit side: FPC connector

Remote side (housing site): 52610-3071 (made by Molex)

(2) Pin assignment on the mechanical side

No	Signal	I/O	Contents
1	PHK	—	Photointerrupter (Cathode)
2	VSEN	I	Ground power supply for paper sensor
3	PHE	O	Emittor for photo interrupter
4	VH	I	Head drive power
5	VH	I	Head drive power
6	VH	I	Head drive power
7	DI	I	Data input
8	$\overline{\text{STB3}}$	I	Strobe 3
9	$\overline{\text{STB4}}$	I	Strobe 4
10	VDD	—	Logic Power
11	GND	—	Head ground
12	GND	—	Head ground
13	GND	—	Head ground
14	GND	—	Head drive power
15	GND	—	Head drive power
16	GND	—	Head drive power
17	TM	O	Thermistor
18	$\overline{\text{STB1}}$	I	Strobe 1
19	$\overline{\text{STB2}}$	I	Strobe 2
20	$\overline{\text{LAT}}$	I	Data Latch
21	CLK	I	Clock
22	VH	I	Head drive power
23	VH	I	Head drive power
24	VH	I	Head drive power
25	SW	—	Platen open switch
26	SW	—	Platen open switch
27	MT A	I	Motor excite signal A
28	$\overline{\text{MT A}}$	I	Motor excite signal $\overline{\text{A}}$
29	MT B	I	Motor excite signal B
30	$\overline{\text{MT B}}$	I	Motor excite signal $\overline{\text{B}}$

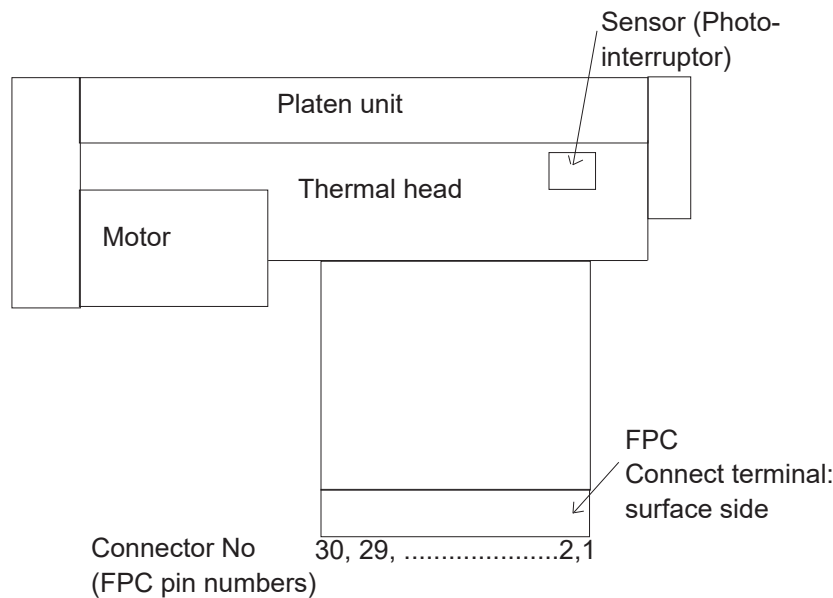

2. Cutter (CN5)

Connector on control circuit side: 52610-0871 Molex or equivalent

No.	Signal	I/O	Contents	No.	Signal	I/O	Contents
1	VSEN	I	Paper sensor power	2	PHE	O	Photo interruptor (emitter)
3	PHK	—	Photo interruptor (cathode)	4	MT A	I	Motor excite signal A
5	MT $\bar{A}$	I	Motor excite signal A	6	MT B	I	Motor excite signal B
7	MT $\bar{B}$	I	Motor excite signal B	8	NC	—	Not connected

Contact

MEIKO ELECTRONIC COMPONENTS CO., LTD.
935, Nosakada, Oaza, Iiyama-shi,
Nagano, 389-2233, Japan
Tel: (81-3) 0269-62-1155

Copyright

All trademarks or registered trademarks are the property of their respective owners. Meiko Electronic Components Co., Ltd. does not warrant that the content of datasheet is error free. In a continuing effort to improve our products Meiko Electronic Components Co., Ltd. reserves the right to change specifications/datasheets without prior notice.
Copyright ©2026 Meiko Electronic Components Co.,Ltd. All rights reserved. Revised June 1, 2026.