


# ULTRA MINIATURE RELAY SIGNAL RELAY

## FTR-C2 Series

RoHS Compliant

### ■ FEATURES

- Dimensions of large contact gap relay
  - Height: 11.8 mm maximum (THT)  
12 mm maximum (SMT)
  - Length: 20.2 mm maximum
  - Width: 10 mm maximum
- Conforms to IEC60950 / EN60950 / UL1950/ CSA C22.2 No.950 spacing & high breakdown voltage
- Recognized by UL/CSA and Bsi
  - UL: File E63615 Vol. 2 Sec.4
  - CSA: Master contract 169663 Certificate 1088921
    - Clearance: 2.0 mm (between open contacts, coil and contacts, contact sets)
    - Creepage: 2.0 mm (between open contacts, coil and contacts, contact sets)
- HIGH RELIABILITY
  - Bifurcated contacts
- Low power consumption 300 mV
- RoHS Compliant since production

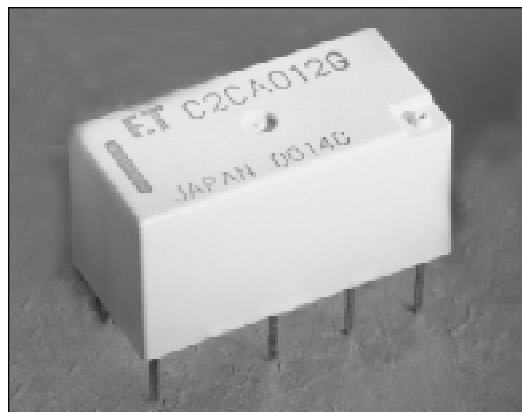

### ■ ORDERING INFORMATION

[Example]     FTR-C2   C   A   012   G   -B   05\*  
                   (a)     (b) (c) (d)   (e) (f) (g)

(a)	Series Name	FTR-C2
(b)	Terminal Appearance	C: Through hole type G: Surface mount type
(c)	Operation Function	A: Standard type B: Latching type
(d)	Coil Number	Nominal Voltage
(e)	Contact Material	G: Silver alloy
(f)	Relay enclosing direction	B: standard enclosing direction
(g)	Number of relays per reel	05: 500 (standard)

Remarks: Actual marking on relay would not carry code FTR and be as below:

Ordering code                      Actual marking  
 FTR-C2CA03G                      →                      C2CA03G

\*only SMT version

# FTR-C2 Series

## ■ COIL DATA CHART

Standard type

Model	Nominal Voltage	Coil Resistance (±10%)	Must Operate Voltage	Must Release Voltage	Nominal Operating Power (±10%)
FTR-C2 ( ) A003G	3 VDC	30.0 Ω	2.25 VDC	0.3 VDC	300 mW
FTR-C2 ( ) A005G	5 VDC	83.3 Ω	3.75 VDC	0.5 VDC	300 mW
FTR-C2 ( ) A012G	12VDC	480.0 Ω	9.00 VDC	1.2 VDC	300 mW
FTR-C2 ( ) A024G	24 VDC	1,920.0 Ω	18.00 VDC	2.4 VDC	300 mW

Single coil latching type

Model	Nominal Voltage	Coil Resistance (±10%)	Set Voltage	Reset Voltage	Nominal Operating Power (±10%)
FTR-C2 ( ) B003G	3 VDC	60.0 Ω	2.25 VDC	2.25 VDC	150 mW
FTR-C2 ( ) B005G	5 VDC	167.0 Ω	3.75 VDC	3.75 VDC	150 mW
FTR-C2 ( ) B0012G	12VDC	960.0 Ω	9.00 VDC	9.00 VDC	150 mW
FTR-C2 ( ) B024G	24 VDC	3,840.0 Ω	18.00 VDC	18.00 VDC	150 mW

Note: All values in the table are measured at 20°C.

# FTR-C2 Series



## ■ SPECIFICATIONS

Item		FTR-C2CA ( )G FTR-C2GA-( )G	
Contact	Arrangement	2 Form C	
	Material	Silver alloy	
	Resistance (initial)	Max. 150m ohm (at 1A 6VDC)	
	Max. Switching Power	37.5AV / 30W	
	Max. Switching Voltage	250VAC, 220 VDC	
	Max. Switching Current	1 A	
Coil	Operating Temperature	-40° C to + 85° C (no frost)	
	Max. Allowable Voltage	150% nominal voltage (at 20° C)	
Time Value	Operate Time	Max. 15ms (at nominal voltage, without bounce)	
	Release Time (without diode)	Max. 15ms (at nominal voltage, without bounce)	
Insulation	Resistance (at 500 VDC)		Min. 1,000M ohm
	Dielectric Strength	Between open contacts	1,500VAC, 1 minute
		Between adjacent contacts	1,500VAC, 1 minute
		Between coil and contacts	2,000VAC, 1 minute
	Surge Strength	Between open contacts	2,500V (at10/700micros)
		Between adjacent contacts	2,500V (at10/700micros)
Between coil and contacts		2,500V (at10/700micros)	
Life	Mechanical	10x10 <sup>6</sup> operations min. (at 10Hz)	
	Electrical (resistive load)	100x10 <sup>3</sup> operations min. at 1A, 30VDC, 0.5Hz 100x10 <sup>3</sup> operations min. at 0.1A, 48VDC, 0.5Hz 100x10 <sup>3</sup> operations min. at 0.3A, 125VDC, 0.5Hz	
Vibration Resistance	Misoperation	10 to 55 Hz at double amplitude of 3.3 mm	
	Endurance	10 to 55 Hz at double amplitude of 5 mm	
Shock Resistance	Misoperation	Min. 300 m/s <sup>2</sup>	
	Endurance	Min. 1,000 m/s <sup>2</sup>	
UL / CSA	Contact Rating	0.3A 125 VAC 1A 30VDC 0.3 110VDC	
IEC060950 UL1950 C22.2 No.950 EN60950	Insulation Class	Supplementary Insulation	
	Working Voltage	250 V	
	Pollution Degree	2 (outside)	1 (inside)
	Clearance	2.0 mm (outside)	2.0 mm (inside)
	Creepage Distance	2.5 mm (outside)	2.0 mm (inside)

# FTR-C2 Series

## ■ DIMENSIONS AND SCHEMATICS


Through hole type

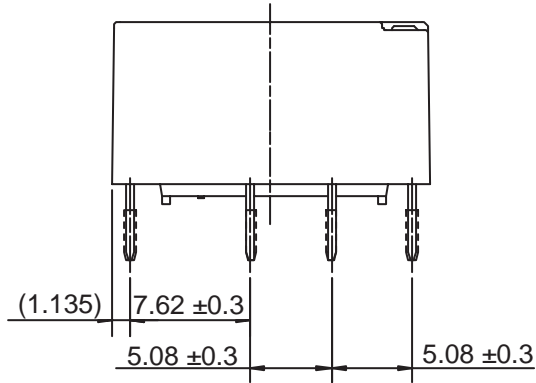


Unit: mm

## ■ TERMINAL DESIGNATIONS

(Bottom view de-energized position)

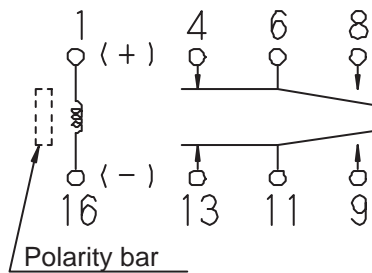


## ■ RECOMMENDED MOUNTING PAD

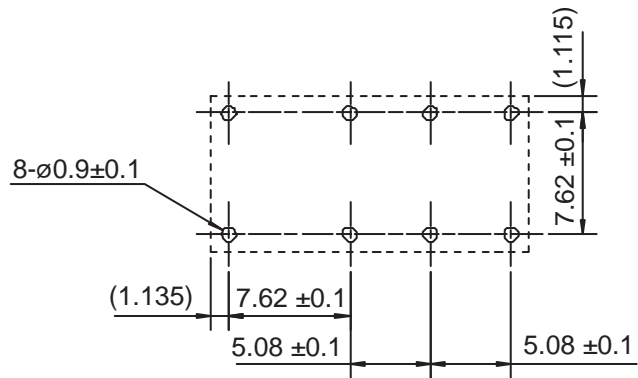

## Single Coil Latching Type

(Bottom view reset position)

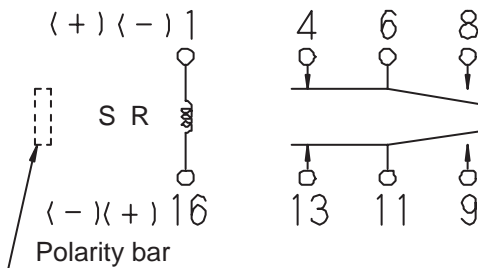


S: shows polarity of set position  
R: shows polarity of reset position

Unit: mm

# FTR-C2 Series

## ■ DIMENSIONS AND SCHEMATICS


Surface mount type

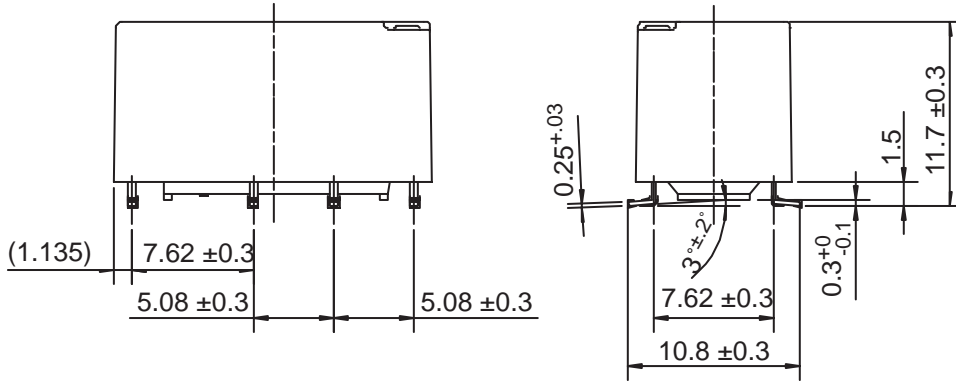


Unit: mm

## ■ TERMINAL DESIGNATIONS

(Top view de-energized position)

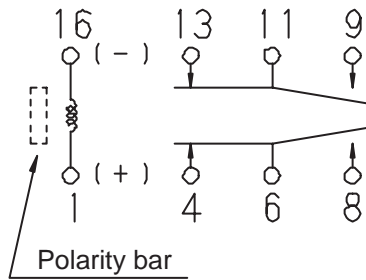


## ■ RECOMMENDED MOUNTING PAD

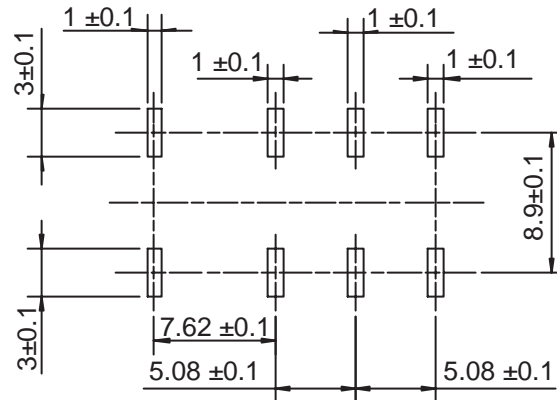

## Single Coil Latching Type


(Top view reset position)

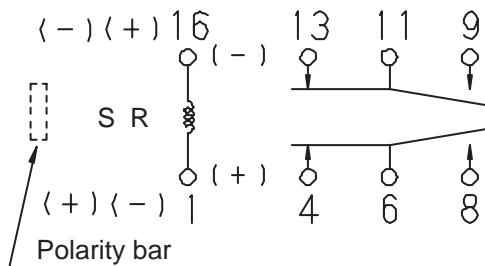

S: shows polarity of set position  
R: shows polarity of reset position

Unit: mm

## ■ RECOMMENDED SOLDERING CONDITIONS (TEMPERATURE PROFILE)

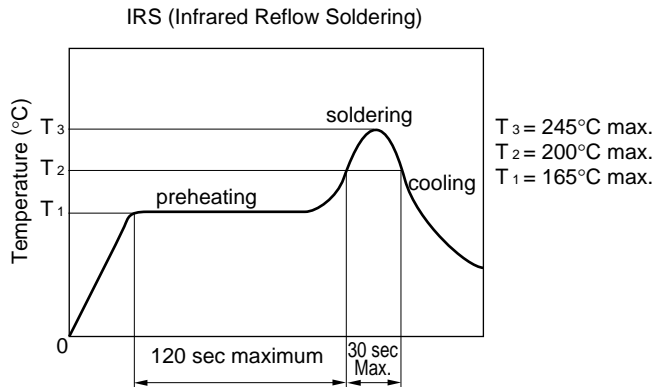

- Note:
1. Temperature profiles show the temperature of PC board surface.
  2. Please perform soldering test with your actual PC board before mass production, since the temperatures of PC board surfaces vary according to the size of PC board, status of parts mounting and heating method.

### Fujitsu Components International Headquarter Offices

#### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

#### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [marcom@fcai.fujitsu.com](mailto:marcom@fcai.fujitsu.com)  
Web: [www.fcai.fujitsu.com](http://www.fcai.fujitsu.com)

#### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [www.fceu.fujitsu.com](http://www.fceu.fujitsu.com)

#### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#04-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
[www.fcal.fujitsu.com](http://www.fcal.fujitsu.com)

© 2005 Fujitsu Components America, Inc. All company and product names are trademarks or registered trademarks of their respective owners. Rev. 03/03/2005.