

SOLID STATE RELAY

MAXIMUM LOAD CURRENT 3 A

SG Series

RoHS compliant

■ FEATURES

- Conforms to UL, CSA Standards
- Slim, SIL Terminal Type
 - Size: 9.0 (W) × 40.0 (L) × 20.0(H) mm
 - Weight: approximately 13g
- High reliability, long life and maintenance free
- High isolation (between input and output)
 - Dielectric strength: 2,500 Vrms
- Internal zero cross circuit type available
- Internal output surge absorber (varistor) type available.
- RoHS compliant since date code: 6703 (July 3rd, 2006)
 - Please see page 5 for more information



■ ORDERING INFORMATION

[Example] SG - 12 A 03 C V L
 (a) (b) (c) (d) (e) (f) (g)


(a)	Series Name	SG: SG Series
(b)	Nominal Voltage (Input side)	3 : 3 VDC 5: 5 VDC 12: 12 VDC 24: 24 VDC
(c)	Load Voltage	A: AC type
(d)	Load Current	03: 3 A rms
(e)	Zero Cross Circuit	Nil: No zero cross tyoe C: Zero cross type
(f)	Varistor	Nil: No varistor type V : Internal varistor type
(g)	Input Terminal Distance	Nil: 7.62 mm L: 5.08 mm

SG SERIES

■ SPECIFICATIONS

Item		AC		Remarks
		TYPE 3 A		
INPUT side	Nominal Voltage (DC)	3 V, 5 V, 12 V, 24 V		
	Operate Range	±20% of nominal voltage		
	Must Operate Voltage	80% of nominal voltage		
	Must Release Voltage	Minimum 1 V		
	Input Impedance	3 VDC Type	130Ω ±10%	
5 VDC Type		330Ω ±10%		
12 VDC Type		1.0 kΩ ±10%		
24 VDC Type		2.2 kΩ ±10%		
OUTPUT side	Load Voltage Range	75 to 265 Vrms		
	Maximum Load Current	3.0 Arms		CHARACTERISTIC DATA
	Minimum Load Current	10 mArms		
	1 Cycle Surge Current	132 A (60 Hz)		
	Max. Off-state Leakage Current	2.5 mArms (at 100 Vrms 60 Hz) 5.0 mArms (at 200 Vrms 60 Hz)		
	Max. Off-state Voltage Drop	1.5 Vrms		at max. load current
Max. Operate Time	at no zero cross type	1 ms		
	at zero cross type	1/2 cycle + 1 ms		
Max. Release Time	1/2 cycle + 1 ms			
Insulation Resistance	Minimum 1,000 MΩ (at 500 VDC)		for input-output	
Dielectric Strength	2,500 Vrms for 1 minute		for input-output	
Operating Temperature Range	-30°C to + 85°C			
Storage Temperature Range	-40°C to + 100°C			
Case Color	Black			
Weight	Approximately 13g			

■ BLOCK DIAGRAM

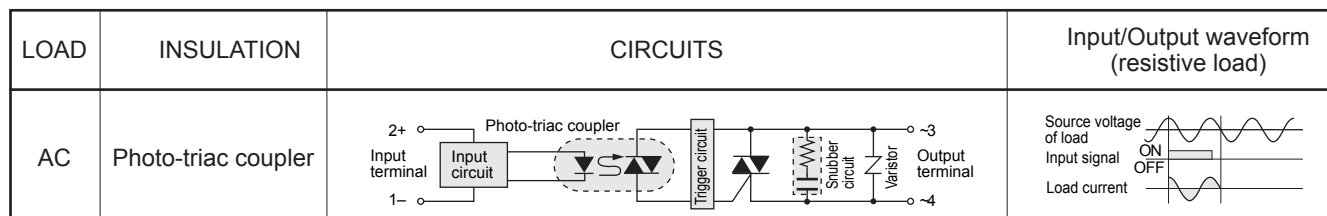


SG SERIES

■ CHARACTERISTIC DATA

SG-A03 (3.0A type)


Ambient Temperature vs. Maximum Load Current

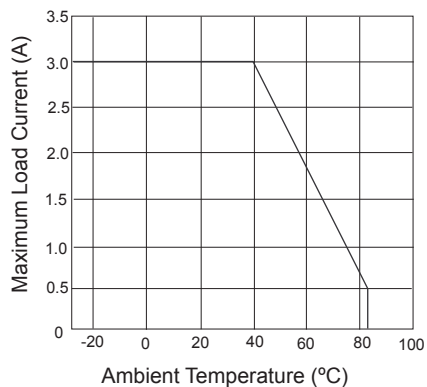

■ DIMENSIONS


● Dimensions

SG-() A03 Type

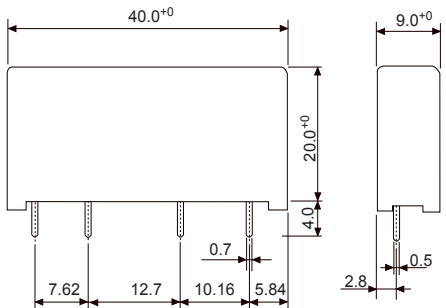


● Schematics

(BOTTOM VIEW)






● PC board mounting hole layout

(BOTTOM VIEW)

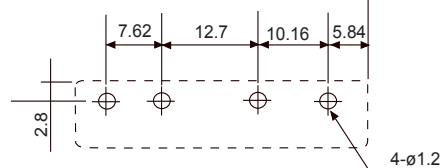

SG-() A03L Type

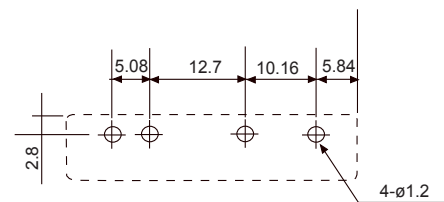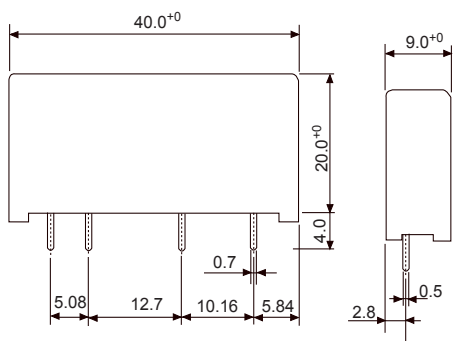


Unit: mm

SG SERIES

■ NOTES

1. Polarity of terminals are pre-determined. Please design accordingly.
2. If using non-Varistor enclosure type please use Varistor type as in Figure 1.

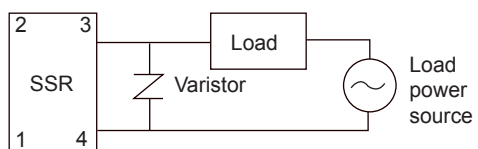

RoHS Compliance and Lead Free Relay Information

1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (for lead-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

Reflow Solder condition

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

SG SERIES

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141 8630, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@fcl.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://www.fujitsu.com/us/services/edevices/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@fcal.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>


©2006 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. October 06/2006

■ SPECIFICATIONS

Item		AC		Remarks
		TYPE 3 A		
INPUT side	Nominal Voltage (DC)	3 V, 5 V, 12 V, 24 V		
	Operate Range	±20% of nominal voltage		
	Must Operate Voltage	80% of nominal voltage		
	Must Release Voltage	Minimum 1 V		
	Input Impedance	3 VDC Type	130Ω ±10%	
5 VDC Type		330Ω ±10%		
12 VDC Type		1.0 kΩ ±10%		
24 VDC Type		2.2 kΩ ±10%		
OUTPUT side	Load Voltage Range	75 to 265 Vrms		
	Maximum Load Current	3.0 Arms		CHARACTERISTIC DATA
	Minimum Load Current	10 mArms		
	1 Cycle Surge Current	132 A (60 Hz)		
	Max. Off-state Leakage Current	2.5 mArms (at 100 Vrms 60 Hz) 5.0 mArms (at 200 Vrms 60 Hz)		
	Max. Off-state Voltage Drop	1.5 Vrms		at max. load current
Max. Operate Time	at no zero cross type	1 ms		
	at zero cross type	1/2 cycle + 1 ms		
Max. Release Time		1/2 cycle + 1 ms		
Insulation Resistance		Minimum 1,000 MΩ (at 500 VDC)		for input-output
Dielectric Strength		2,500 Vrms for 1 minute		for input-output
Operating Temperature Range		-30°C to + 85°C		
Storage Temperature Range		-40°C to + 100°C		
Case Color		Black		
Weight		Approximately 13g		

■ BLOCK DIAGRAM

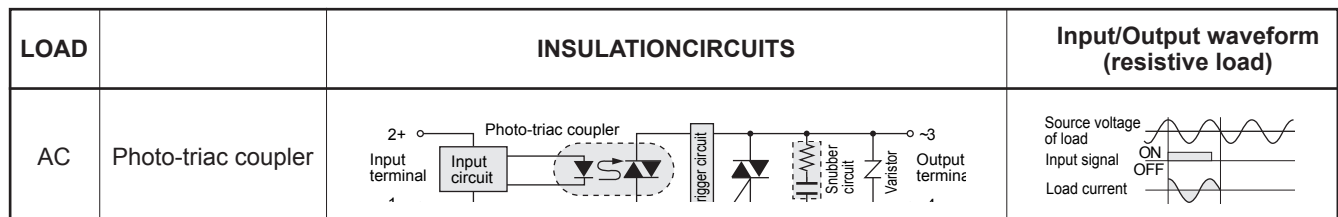


SG SERIES

CHARACTERISTIC DATA

SG-A03 (3.0A type)

Ambient Temperature vs. Maximum Load Current

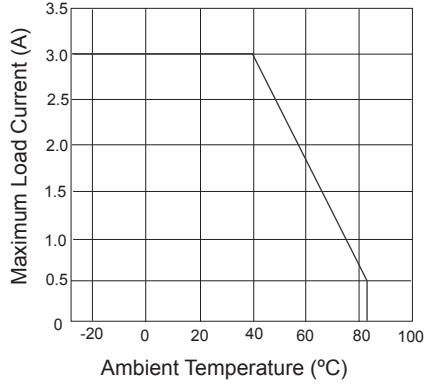

DIMENSIONS

● Dimensions	● Schematics (BOTTOM VIEW)	● PC board mounting hole layout (BOTTOM VIEW)
<p>SG-() A03 Type</p>		
<p>SG-() A03L Type</p>		

Unit: mm

■ NOTES

- 1. Polarity of terminals are pre-determined. Please design accordingly.
- 2. If using non-Varistor enclosure type please use Varistor type as in Figure 1.

